


Splice Plate

An economical on-site method of butt jointing timbers of similar section. Suitable for use when replacing rotten floor joist ends, replacement of fire damaged timbers and repairing localised structural

timber damage. Must be fixed in sets of 4 per joint, minimum timber thickness 50mm. Fix using BPC sherardized square twist nails in all available holes. Box includes required nails.

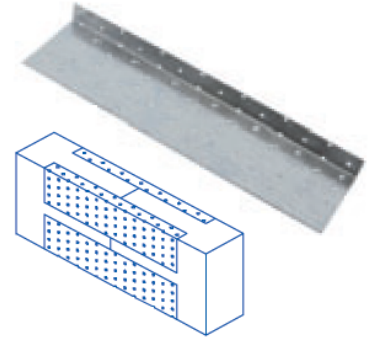

Product Reference	Size	Length	Box Qty.
SP/57x400	57x18mm	400mm	32pcs + nails
SP/82x550	82x18mm	550mm	32pcs + nails
SP/98x550	98x18mm	550mm	32pcs + nails
SP/100x350	100x15mm	350mm	32pcs + nails

